


PROTEX 5800 / 580gsm PVC FR Matt

152cm & 205cm (V3)

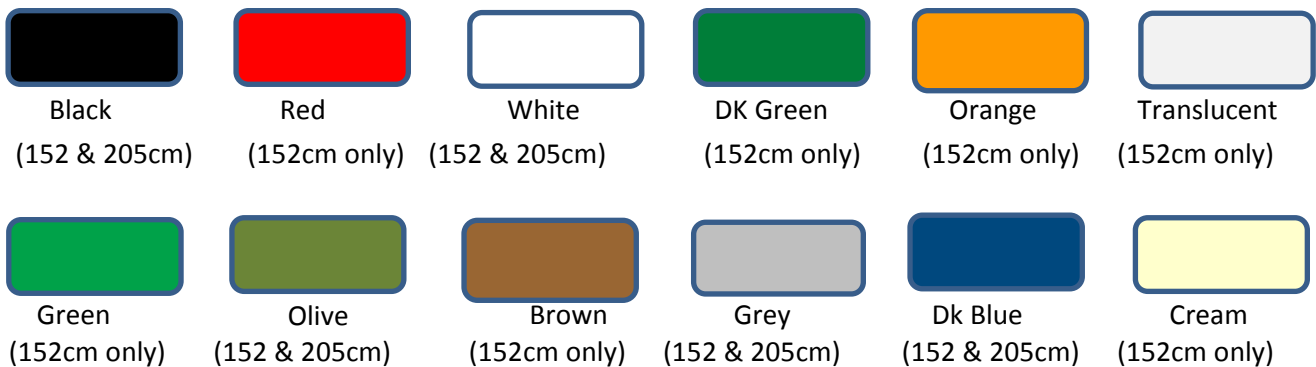

Base fabric: 500 Decitex, Woven polyester 77 gms
 Coating: Laminate of Flexible PVC on each side of fabric
 Total mass: 580 / 610 gsm
 Finish: Matt
 Roll length: 50m
 Roll widths: 152cm & 205cm

Physical properties tested in accordance with BS 3424 "Methods of test for coated fabrics"

TENSILE STRENGTH: Warp 1000 N / 50mm Part 4, Method 6	Weft 1400 N / 50mm	FLAMIBILITY: Complies with BS5867 Part 2 Type A and B when Tested by BS5438 Test 2
COATING ADHESION: 30N / 50mm Part 7 Method 9B		WATER PENETRATION: Min. 1500 mm
COLD CRACK: Not higher than -25°C Part 8 Method 10A		CHEMICAL RESISTANCE: Generally
		FLEX RESISTANCE: 500,000 flexes minimum to meet the requirements of ISO 7854 1984 (Method B)

DECABROMODIPHENYL ETHER (DECABDE) FREE

Conforms with BS3408/20

REACH: Complies with regulation (EC) No. 1907/2006 concerning REACH- Test period March 2014

tel. 0141 773 5469

fax. 0141 773 5455

email. info@mitco.co.uk