


HYTEX R15 Canvas FWR or SDC

Cotton / Canvas- Flame, Rot & Waterproof

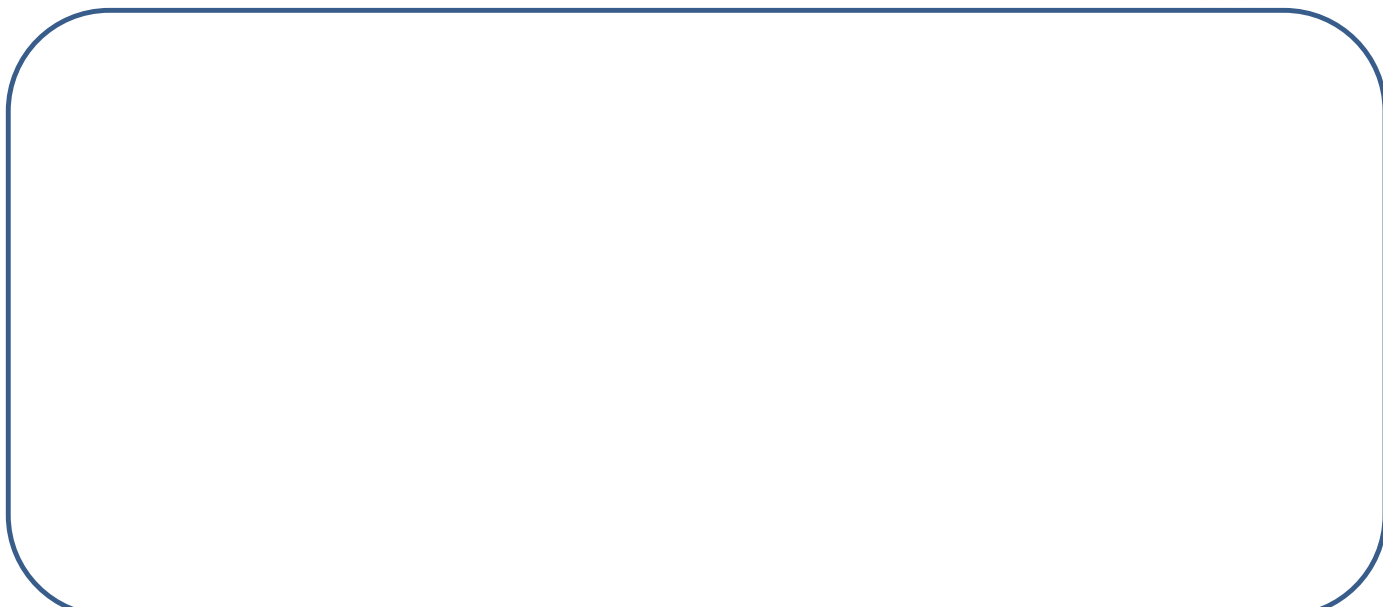

Green

	FWR	SDC
91cm	√	√
183cm	√	

White

FWR	SDC
√	

Olive

FWR	SDC
	√

Base fabric: Cotton canvas
Finish: Closed selvedge
Weight: 15oz/yd² - 509gms/m² (+/- 5)
Width: 91 cm
Roll length: approx. 80 to 100 m

PHYSICAL PROPERTY	SPEC.	TOL	TEST METHOD
Bath test- leakage (mls)	Nil	-	Internal
Bath test- Absorbtion (%)	16 max	-	Internal
Crushed cone test- leakage (mls)	Nil	-	BS 3408: 1992
Cone test- Absorbtion (%)	Nil	-	"
Hydrostatic head tested (10cm / min)	18	-	ISO 811
Flammability- bottom edge	pass	-	BS 7837 (BS 5438 2B)
Flammability (after soaking)- bottom edge	pass	-	BS 7837/BS 5651
Colour fastness, dry rub / wet rub	3 / 3	-	ISO 105 X 12 BS 1006 X 12
Rotproof content	Pass	-	BS 2087 PT2- 6.5 METH. 5
Spray rating	3	-	ISO 4920 BS EN24920
Tensile Strength, Warp / Weft	1000 / 900	-	EN ISO 13934-1
Wing Rip Tear, Warp / Weft	35 / 30	-	EN ISO 13937-1

tel. 0141 773 5469

fax. 0141 773 5455

email. info@mitco.co.uk

www.mitco.co.uk